

DV-30 Desktop Validation Unit

The **DV-30 Desktop Validation Unit** is a fully customizable ticket validation device. With this unit's versatile settings merchants can use various validation types such as flat rate, discounted, hours discount and more. Validations are monitored in real-time in the TMS-Smart park management software. Validations can also be associated with a specific user group for future billing. All parking devices in the system will recognize the validation, calculate the new parking fee and update the balance accordingly.

Features*

- LCD Display
- Can operate as a stand-alone unit for hotel applications
- 4 x 4 Operator keypad
- Embedded industrial controller
- Supports RS-485 or TCP/IP communication
- Management software monitoring
- Reset time is 4 seconds
- Auto network recovery mode
- Can operate as a stand-alone unit for hotel applications
- Data line surge suppressor
- Rugged steel housing for durability

Applications

- Retail
- Office Building
- Movie Theater
- Medical Center
- Special Events
- Hotel
- Valet



* Not all features are available or standard in all regions.
Check with your local sales person for availability.



ATLANTA, GEORGIA U.S.A.






Strong and Secure

Authorized Distributor

www.ontarioparking.com

519 667 1482

DV-30 Desktop Validation Unit

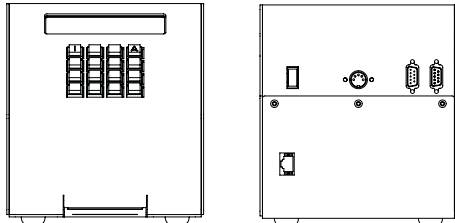

Features

Validation Method	Barcode scanning
Input/Output Devices	Encoder Unit for hotel room key encoding
Device Display	LCD display
Operator Interface	4 x 4 keypad
Data-Line Surge Protection	Standard

Operation

Processor	Embedded industrial controller
Programming	RS-485 industrial communication or TCP/IP network communication
Clock	Built in super-cap battery
Monitoring	Transaction and all events monitored on TMS software in real time

Housing – Rugged Steel

Measurements	7" (177 mm) length; 7" (177 mm) width; 7" (177 mm) height
Weight	2.55 lbs. (1.16 kg.)
Color (housing)	Dark blue

Electrical

Voltage	100-240V AC 50-60 HZ
Current	1.35A
Power Consumption	135W

Environment Conditions

Operating Temperature	-4° to 122° F (-20° to 50° C)
-----------------------	-------------------------------

Regulatory



Safety	<ul style="list-style-type: none"> • UL 60950-1:2007 • CAN/CSA-C22.2 No. 60950-1-07
EMC	<ul style="list-style-type: none"> • FCC Part 15, Subpart B, Class B • CE EMC



**MP-30
Entry Station**



**DV-30
Validator**



**APS-30
Pay Station**



**SW-30
Exit Station**



Subject to design and functionality changes until product shipping.